

ENCOR® FLEX 3186

MODIFIED-ACRYLIC LATEX FOR ELASTOMERIC COATINGS



Product Description

ENCOR® Flex 3186 is a modified acrylic latex designed for cost-effective elastomeric roof and wall coatings, offering a good balance of properties such as weatherability, elongation, water resistance and caustic resistance. ENCOR® Flex 3186 is also designed with excellent dirt pickup resistance and is intended to be used in roof systems that meet the “Cool Roof Rating Council’s (CRRC)” product rating program requirements for reflectance and emittance at VOC levels less than 50 g/L.

Polymer Design

- Modified Acrylic Latex
- Low VOC Capable (<50 g/L)

Performance Benefits

- Balance of tensile and elongation properties
- UV initiated crosslinking for excellent dirt pick-up resistance
- Outstanding caustic swelling resistance
- Excellent flexibility at temperature as low as 0°F
- Good water resistance
- Cement compatible

Typical Properties¹

Total Solids, % by weight	50
Density, pounds per gallon	8.8
pH Value	8.0
Particle Size, μm	0.20
Viscosity, Brookfield, cP	300
Glass Transition Temp. (Tg), midpoint °C	-7
Clear Film Properties	
Ultimate Tensile Strength, psi	195
Ultimate Elongation, %	1115

¹Typical values not to be construed as sales specifications.




ENCOR® FLEX 3186

MODIFIED-ACRYLIC LATEX FOR ELASTOMERIC COATINGS

Performance Evaluations


ENCOR® Flex 3186 was evaluated in an elastomeric roof coating formulation across standard Pigment Volume Concentration (PVC) ratios of 30, 40, and 50 PVC. The formulation based on ENCOR® Flex 3186 was compared to formulations based on commercially available acrylic and styrene acrylic latexes.

Elongation

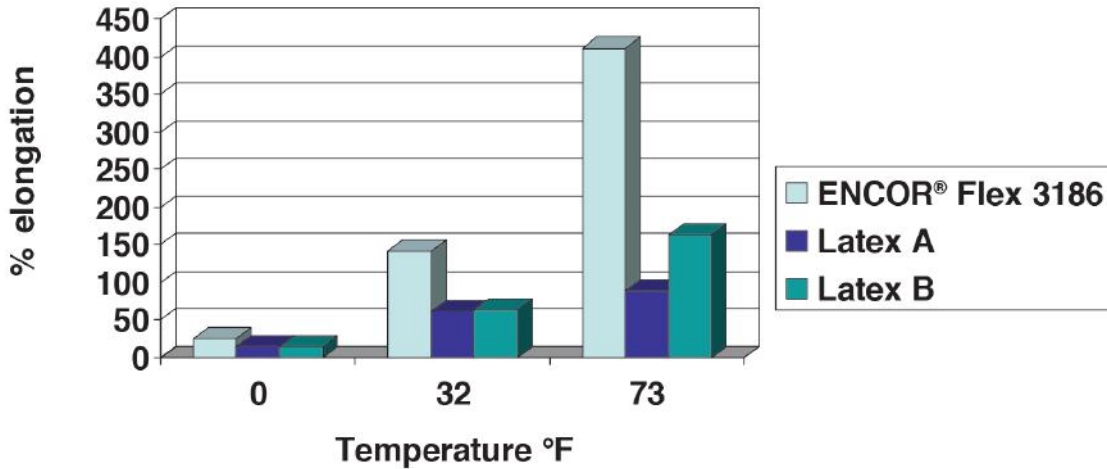

ENCOR® Flex 3186 demonstrates excellent elongation properties across the temperature range.


Tensile Strength

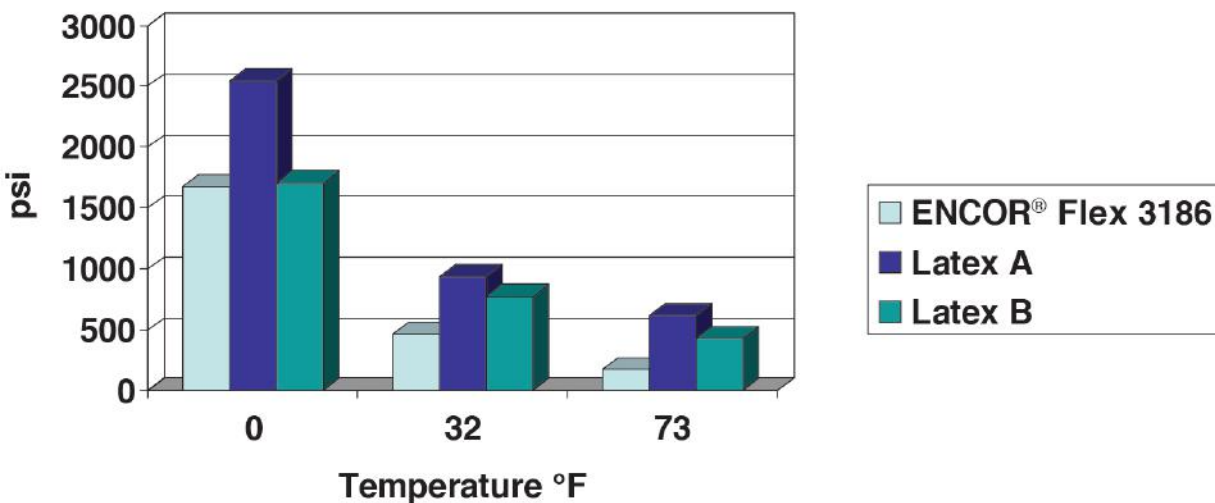

ENCOR® Flex 3186 has tensile strength properties across the temperature range comparable to competitive technologies.


Water Resistance at 40% PVC

Permeance

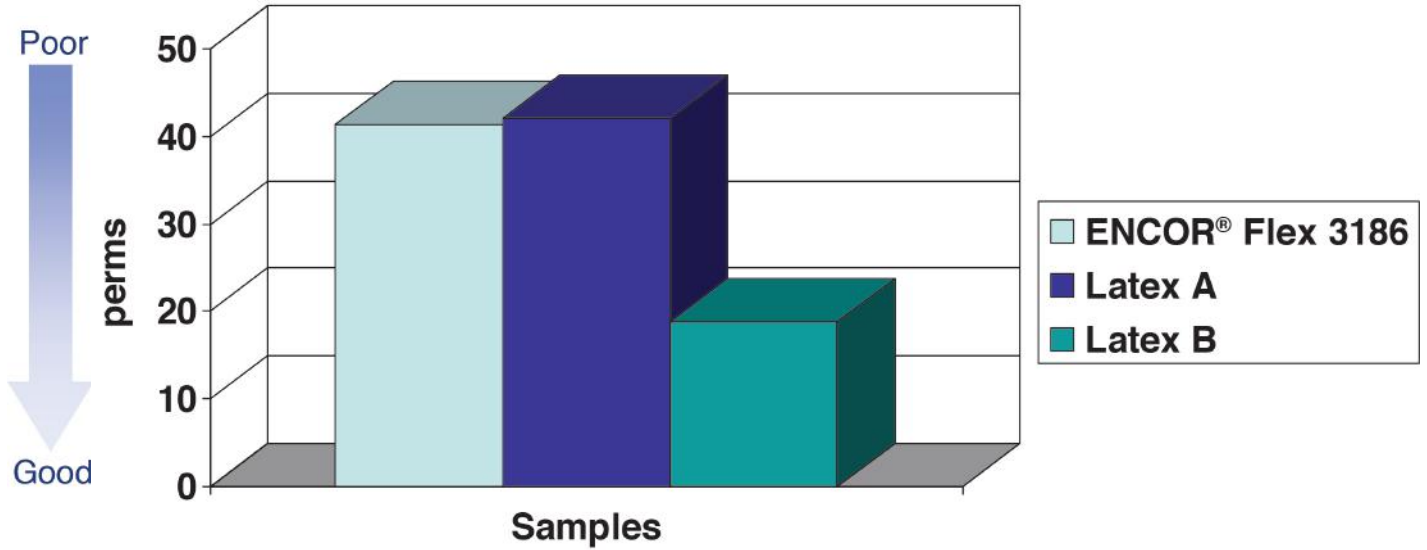


ASTM D-6083 target <50 perms. All technologies meet the performance requirement.

Water Swelling

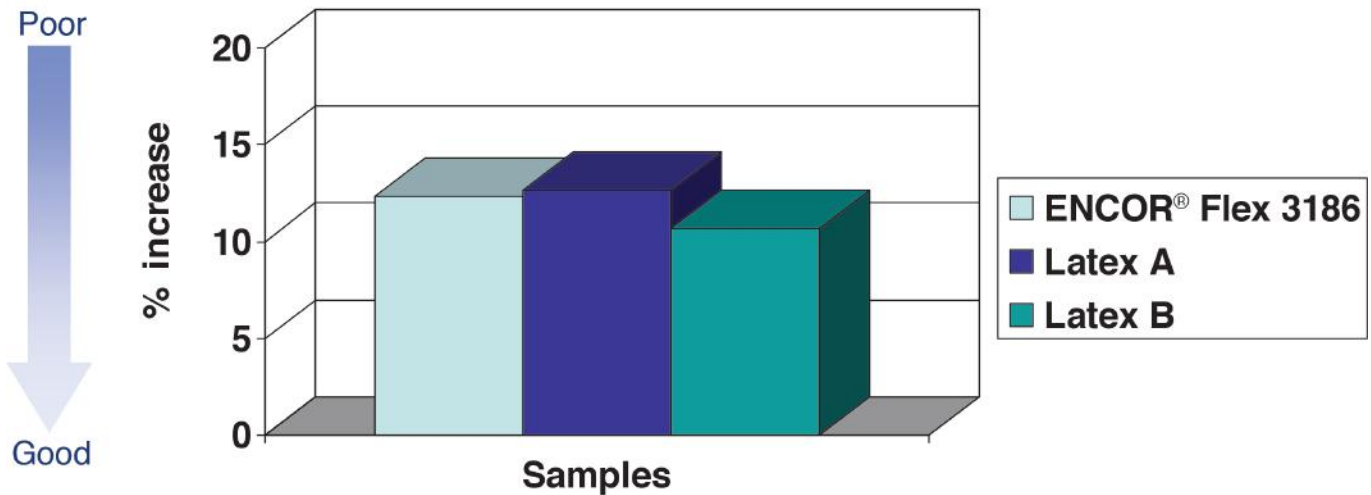


ASTM D-6083 target is <20%. All technologies meet the performance requirement.

Caustic Swelling at 40% PVC

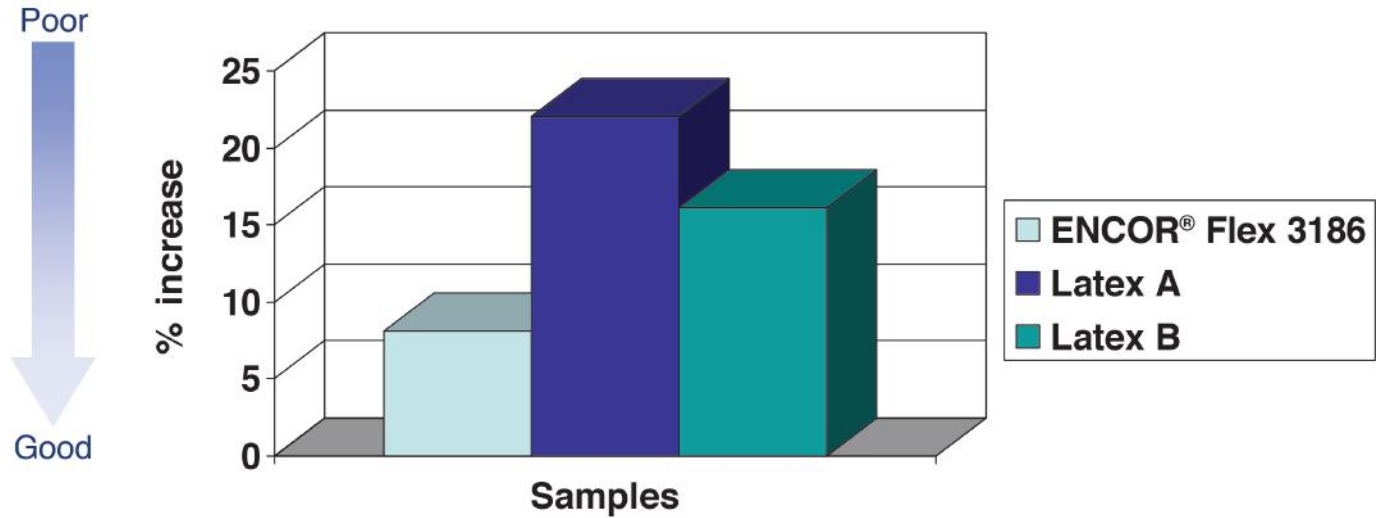

ENCOR® Flex 3186 shows the least impact from caustic solution.

Tear Strength

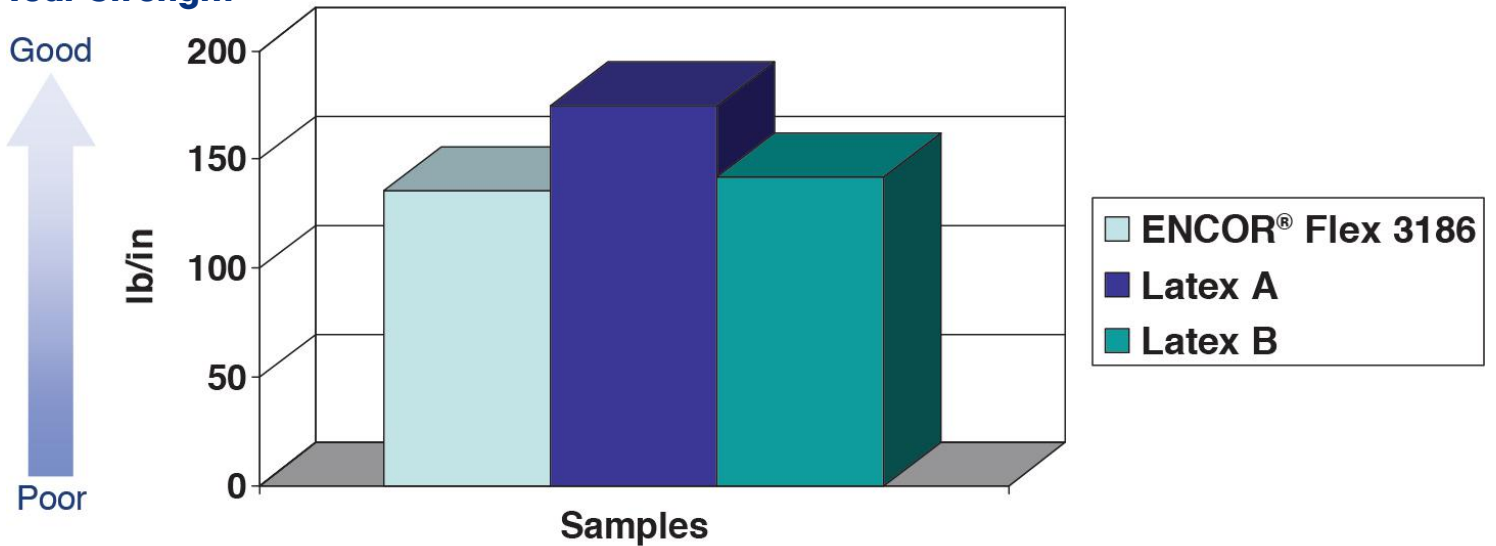


ASTM D-6083 requires >60 lb/in. All technologies perform similarly.

ENCOR® FLEX 3186

MODIFIED-ACRYLIC LATEX FOR ELASTOMERIC COATINGS

Accelerated Dirt Pick-Up Resistance*

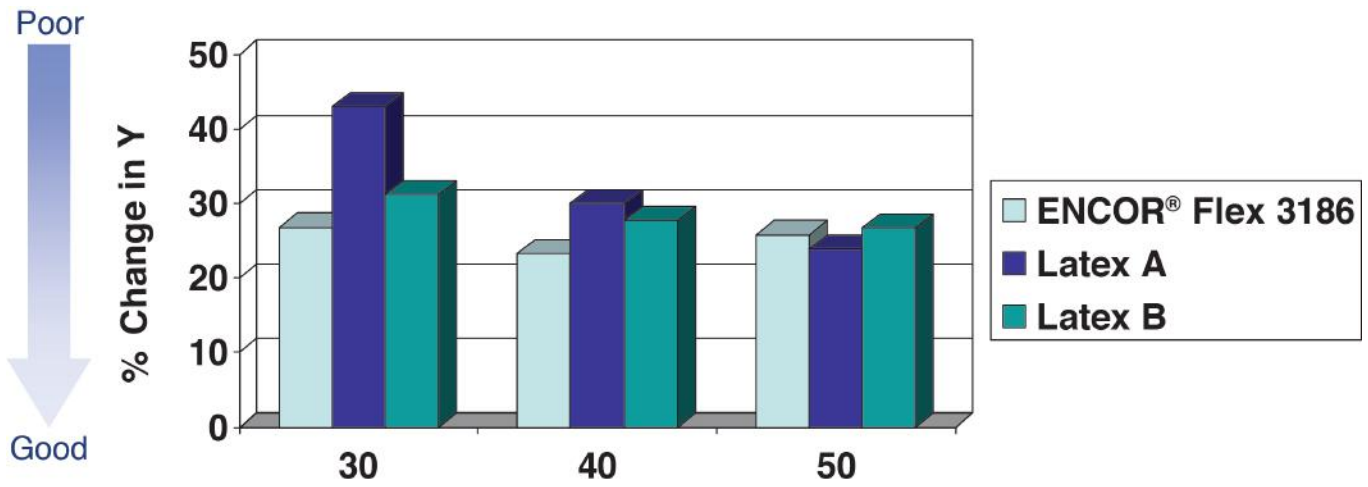

*Coating tested after 100 hours PVC OUV

ENCOR® Flex 3186 demonstrating the best pick-up resistance across PVC range.

Accelerated Dirt Pick-Up Resistance



ENCOR® FLEX 3186

MODIFIED-ACRYLIC LATEX FOR ELASTOMERIC COATINGS

Starting Point Formulation

ENCOR® Flex 3186 Formulation

Ingredients		Lbs	Gallons	Paint Properties:	
<i>Grind</i>				Weight Solids, %	64.5
Water	Solvent	86.0	10.3	Volume Solids, %	50.3
Tamol 165	Dispersant	25.5	2.9	PVC, %	40.4
Surfynol® 104E	Surfactant	2.5	0.3	VOC, g/L	64
Propylene Glycol	Solvent	19.2	2.1	Density, lb/gal	11.8
Foamaster® NXZ	Defoamer	1.5	0.2	Total Pigment, %	41.1
Ti-Pure® R-960	TiO ₂	98.0	2.9	Non-volatile Binder, %	23.5
Drikalite®	Extenders	385.0	17.1	Coalescent Level, %	1.5
Polyphase® 663	Mildewcide	7.0	0.3	Dispersant Level, %	1.1
<i>Letdown</i>					
ENCOR® Flex 3186	Binder - Latex	550.0	61.8		
Texanol®	Solvent	4.1	0.5		
Foamaster® NXZ	Defoamer	4.1	0.5		
Polyphobe 106 HE	HASE Thickener	8.0	0.9		
Ammonium Hydroxide, 28%	Base	1.6	0.2		
Totals		1192.5	100.1		
PVC = 40%					

Formulating Guidelines

- Avoid associative thickeners due to water sensitivity
- Extenders should be limited to low oil absorption and particle sizes above 10µm
- Keep pigment volume concentration less than 45%; higher PVCs can lower adhesion results
- Field testing is recommended to assure adhesion

Surfynol® is a registered trademark of Air Products & Chemicals Inc.
Foamaster® is a registered trademark of Cognis IP Management GmbH
Ti-Pure® is a registered trademark of DuPont

Drikalite® is a registered trademark of ECC America Inc.
Polyphase® is a registered trademark of Troy Technology Corporation, Inc.
Texanol® is a registered trademark of Eastman Chemical Company

ENCOR® FLEX 3186

MODIFIED-ACRYLIC LATEX FOR ELASTOMERIC COATINGS

Starting Point Formulation

ENCOR® Flex 3186 Zinc Oxide Formulation

Ingredients		Lbs	Gallons
<i>Grind</i>			
Water	Solvent	99.0	11.9
Coadis™ 123K	Dispersant	25.5	2.9
Surfynol® 104E	Surfactant	2.5	0.3
Propylene Glycol	Solvent	10.0	1.1
Foamaster® NXZ	Defoamer	1.5	0.2
Ti-Pure® R-960	TiO ₂	98.0	2.9
Drikalite®	Extenders	360.0	16.0
Eagle Zinc	Zinc Oxide	25.0	0.5
Acticide® BW20	Preservation	1.1	0.1
Polyphase® 663	Mildewcide	7.0	0.3
<i>Letdown</i>			
ENCOR® Flex 3186	Binder - Latex	550.0	61.8
Texanol®	Solvent	4.1	0.5
Foamaster® NXZ	Defoamer	4.1	0.5
Viscoatex™ 730	HASE Thickener	6.0	0.7
Ammonium Hydroxide [28%aq]	Base	1.6	0.2
Totals		1194.5	100.0

Paint Properties:

Weight Solids, %	64.3
Volume Solids, %	49.9
PVC, %	39.8
VOC, g/L	45
Density, lb/gal	11.9
Total Pigment, %	41.0
Non-volatile Binder, %	23.5
Coalescent Level, %	1.5
Dispersant Level, %	1.3

Coadis™ and Viscoatex™ are trademarks of Coatex SAS
Surfynol® is a registered trademark of Air Products & Chemicals Inc.
Foamaster® is a registered trademark of Cognis IP Management GmbH
Ti-Pure® is a registered trademark of DuPont

Drikalite® is a registered trademark of ECC America Inc.
Polyphase® is a registered trademark of Troy Technology Corporation, Inc.
Acticide® is a registered trademark of Thor GmbH
Texanol® is a registered trademark of Eastman Chemical Company

Product Safety

Before handling the materials listed in this bulletin, read and understand the product SDS (Safety Data Sheet) for additional information on personal protective equipment and for safety, health and environmental information. For environmental, safety and toxicological information, contact our Customer Service Department at 1-866-837-5532 to find a SDS, or visit our web site: www.arkemacoatingresins.com

No chemical should be used as or in a food, drug, medical device, or cosmetic, or in a product or process in which it may contact a food, drug, medical device, or cosmetic until the user has determined the suitability and legality of the use. Since government regulations and use conditions are subject to change, it is the user's responsibility to determine that this information is appropriate and suitable under current, applicable laws and regulations.

Arkema Coating Resins requests that the customer read, understand, and comply with the information contained in this publication and the current SDS(s). The customer should furnish the information in this publication to its employees, contractors, and customers, or any other users of the product(s), and request that they do the same.

Storage and Handling

Follow procedures typically recommended for polymer dispersions. Use corrosion-resistant storage tanks and piping. Air-operated diaphragm pumps are preferred.

Packaged material should be stored indoors in the original unopened and undamaged container, in a dry place. Exposure to direct sunlight should be avoided.

Avoid extreme temperatures. Do not freeze; store between 40-90°F (4-32°C).

For more details, refer to "Storage and Handling of Arkema Coating Resins Products – A Basic Guide".



Arkema Coating Resins
410 Gregson Dr.
Cary, NC 27511
Telephone:
1.800.777.8227

IMPORTANT: The statements, technical information and recommendations contained herein are believed to be accurate as of the date hereof. Since the conditions and methods of use of the product and of the information referred to herein are beyond our control, Arkema expressly disclaims any and all liability as to any results obtained or arising from any use of the product or reliance on such information; NO WARRANTY OF FITNESS FOR ANY PARTICULAR PURPOSE, WARRANTY OF MERCHANTABILITY OR ANY OTHER WARRANTY, EXPRESS OR IMPLIED, IS MADE CONCERNING THE GOODS DESCRIBED OR THE INFORMATION PROVIDED HEREIN. The information provided herein relates only to the specific product designated and may not be applicable when such product is used in combination with other materials or in any process. The user should thoroughly test any application before commercialization. Nothing contained herein constitutes a license to practice under any patent and it should not be construed as an inducement to infringe any patent and the user is advised to take appropriate steps to be sure that any proposed use of the product will not result in patent infringement.

DISCLAIMER: Please consult Arkema's disclaimer regarding the use of Arkema's products on <http://www.arkema.com/en/products/product-safety/disclaimer/index.html>

Visit our website:
www.arkemacoatingresins.com

© 2018 Arkema Inc. All rights reserved. Revised 10/18
ENCOR® and ENVIA® are registered trademarks of Arkema Inc.